
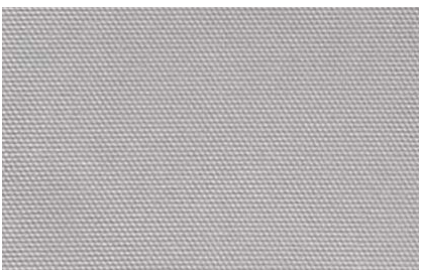
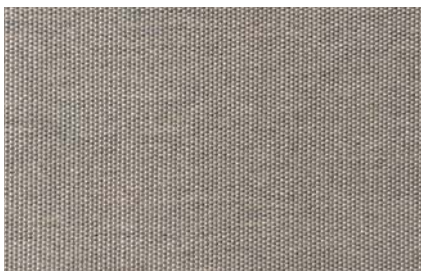
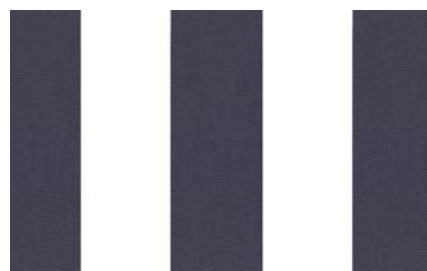


100% OUTDOOR
FABRICS

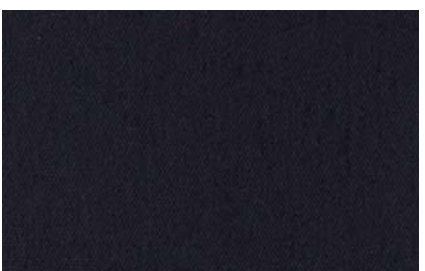

百 分 百 室 外 面 料

100% OUTDOOR FABRICS 百分百室外面料 Indoor 室内 Outdoor 户外 Shade 遮阳伞 Hospitality 酒店工程	100% Solution-Dyed Polyester / SDP色织布	
	Abrasion test/磨损 (ASTM D4157 in Rubs)	> 20000 Water repellent/泼水度 (AATCC 22-2005, max 100)
	Pilling/起球 (ISO 12495-2 5000 Revolutions) (ASTM D4970 1000 Moments)	4 4 UPF Testing/紫外线保护系数 (AS/NZS 4399-1996)
Colour Fastness to Light/日光牢度 (AATCC 16-2004, Option 3 Grey scale) (ISO 105-B02:2014 Blue wool ref.)		>Class3.0@1000hrs 7-8 CA Technical Bulletin 117-2013/美标防火 Flammability BS 5852/英标防火
		50+ (Actual rating >500) PASS UPON REQUEST

 15225026152cm250g/m²(± 10%)	 15225032152cm250g/m²(± 10%)	 15225040152cm250g/m²(± 10%)
 15225035152cm250g/m²(± 10%)	 152220001152cm250g/m²(± 10%)	 15225039152cm250g/m²(± 10%)
 15225031152cm250g/m²(± 10%)	 15225037152cm250g/m²(± 10%)	 15225038152cm250g/m²(± 10%)
 15225022152cm250g/m²(± 10%)	 15225041152cm250g/m²(± 10%)	 15225033152cm250g/m²(± 10%)
 13743011137cmRepeat/循环9.25"	 15225028152cm250g/m²(± 10%)	 13737012137cmRepeat/循环9.25"
260g/m²(± 5%)	260g/m²(± 5%)	260g/m²(± 5%)

All data are based on the average ratings; different colors/styles maybe vary.
所有数据为实验室与第三方检测机构的平均技术数据。

100% OUTDOOR FABRICS

百分百室外面料



Indoor
室内




Outdoor
户外



Shade
遮阳伞

100% Solution-Dyed Polypropylene / Olefin色织布

Abrasion test/磨耗 (ASTM D4157 in Rubs)	> 8000	Water repellent/泼水度 (AATCC 22-2005, max 100)	80%
Pilling/起球 (ISO 12495-2 5000 Revolutions) (ASTM D4970 1000 Moments)	4-5 4-5	UPF Testing/紫外线保护系数 (AS/NZS 4399-1996)	50+ (Actual rating >500)
Colour Fastness to Light/日光牢度 (AATCC 16-2004, Option 3 Grey scale) (ISO 105-B02:2014 Blue wool ref.)	>Class3.0@800hrs 7	CA Technical Bulletin 117-2013/美标防火 PASS Flammability BS 5852/英标防火 UPON REQUEST	

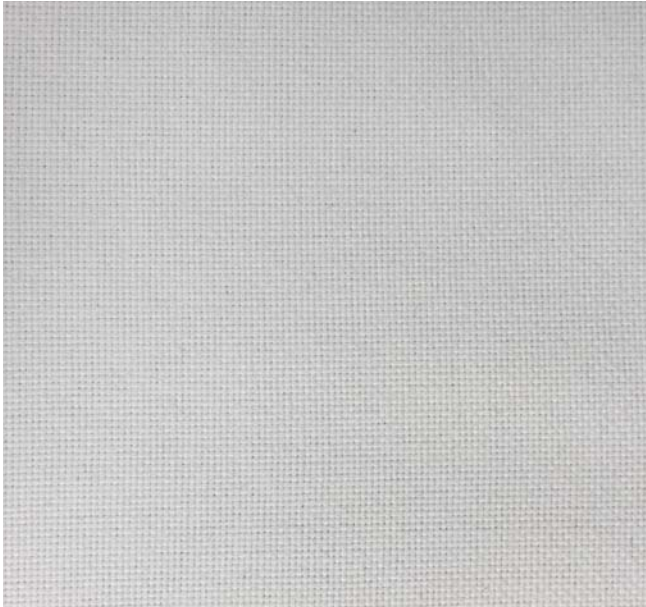

15228500 152cm 200g/m²(±10%)



15228499 152cm 200g/m²(±10%)



15228498 152cm 200g/m²(±10%)

100% OUTDOOR FABRICS

百分百室外面料



Indoor
室内



Outdoor
户外



Shade
遮阳伞




Hospitality
酒店工程

Solution-Dyed Poly mix Sling / Textilene色织布

Abrasion test/磨耗 (ASTM D4157 in Rubs)	> 25000	Water repellent/泼水度 (AATCC 22-2005, max 100)	80%
Pilling/起球 (ISO 12495-2 5000 Revolutions) (ASTM D4970 1000 Moments)	5 5	UPF Testing/紫外线保护系数 (AS/NZS 4399-1996)	50+ (Actual rating >500)
Colour Fastness to Light/日光牢度 (AATCC 16-2004, Option 3 Grey scale) (ISO 105-B02:2014 Blue wool ref.)	>Class4.0@1500hrs 7-8	CA Technical Bulletin 117-2013/美标防火 PASS Flammability BS 5852/英标防火 UPON REQUEST	



15238555T 152cm 480g/m²(±10%)

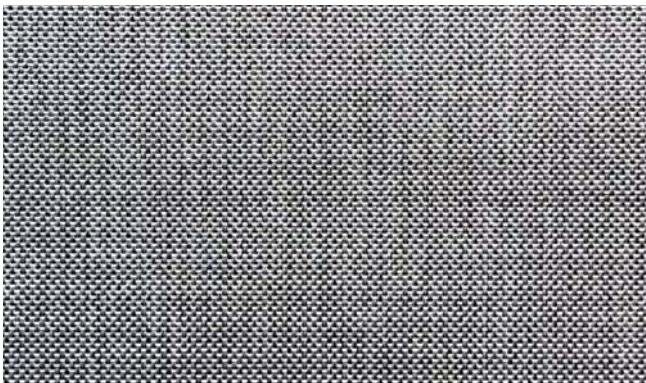


15238554T 152cm 480g/m²(±10%)

All data are based on the average ratings; different colors/styles maybe vary.
所有数据为实验室与第三方检测机构的平均技术数据。

100% OUTDOOR FABRICS 百分百室外面料	100% Solution-Dyed Polypropylene / Olefin色织布				
	Abrasion test/磨损 (ASTM D4157 in Rubs)		> 8000	Water repellent/泼水度 (AATCC 22-2005, max 100)	80%
	Pilling/起球 (ISO 12495-2 5000 Revolutions) (ASTM D4970 1000 Moments)		4-5 4-5	UPF Testing/紫外线保护系数 (AS/NZS 4399-1996)	50+ (Actual rating >500)
 Indoor 室内  Outdoor 户外  Shade 遮阳伞	Colour Fastness to Light/日光牢度 (AATCC 16-2004, Option 3 Grey scale) (ISO 105-B02:2014 Blue wool ref.)		>Class3.0@800hrs 7	CA Technical Bulletin 117-2013/美标防火 PASS Flammability BS 5852/英标防火 UPON REQUEST	



15228497 152cm 200g/m²(±10%)



15228021 152cm 200g/m²(±10%)




15228210 152cm 200g/m²(±10%)




15228130 152cm 200g/m²(±10%)



15221191 152cm 210g/m²(±10%)




15221121 152cm 200g/m²(±10%)



15221126 152cm 210g/m²(±10%)




15228161 152cm 200g/m²(±10%)



15221134 152cm 210g/m²(±10%)




15228099 152cm 200g/m²(±10%)




13718005 137cm 190g/m²(±10%)




13718826 152cm 190g/m²(±10%)




13718325 137cm 180g/m²(±10%)



13718323 137cm 180g/m²(±10%)



13718424 137cm 180g/m²(±10%)



13718326 137cm 180g/m²(±10%)



13720005 137cm 190g/m²(±10%)



13720285 137cm 200g/m²(±10%)




13718811 137cm 190g/m²(±10%)



13720013 137cm 190g/m²(±10%)

All data are based on the average ratings; different colors/styles maybe vary.
所有数据为实验室与第三方检测机构的平均技术数据。


100% OUTDOOR FABRICS 百分百室外面料		100% Dyed Tweed Polyester / 混色涤纶布				
 Indoor 室内  Outdoor 户外  Hospitality 酒店工程	Abrasion test/磨损 (ASTM D4157 in Rubs)		> 15000	Water repellent/泼水度 (AATCC 22-2005, max 100)	90%	
	Pilling/起球 (ISO 12495-2 5000 Revolutions) (ASTM D4970 1000 Moments)		4-5 4-5	UPF Testing/紫外线保护系数 (AS/NZS 4399-1996)		50+ (Actual rating >500)
	Colour Fastness to Light/日光牢度 (AATCC 16-2004, Option 3 Grey scale) (ISO 105-B02:2014 Blue wool ref.)		>Class3.0@400hrs 6	CA Technical Bulletin 117-2013/美标防火 PASS Flammability BS 5852/英标防火 UPON REQUEST		




15216085 152cm 240g/m²(±10%)




15216091 152cm 240g/m²(±10%)




15216090 152cm 240g/m²(±10%)




15216092 152cm 240g/m²(±10%)



15216088 152cm 240g/m²(±10%)



15216086 152cm 240g/m²(±10%)




15216143 152cm 240g/m²(±10%)



15216095 152cm 240g/m²(±10%)




15216041 152cm 240g/m²(±10%)




15216142 152cm 240g/m²(±10%)




15216141 152cm 240g/m²(±10%)




15216145 152cm 240g/m²(±10%)




15216144 152cm 240g/m²(±10%)



15216140 152cm 240g/m²(±10%)




15216135 152cm 240g/m²(±10%)




15216136 152cm 240g/m²(±10%)



15216138 152cm 240g/m²(±10%)



15216139 152cm 240g/m²(±10%)











15216137 152cm 240g/m²(±10%)



15218365 152cm 240g/m²(±10%)

All data are based on the average ratings; different colors/styles maybe vary.
所有数据为实验室与第三方检测机构的平均技术数据。

100% OUTDOOR FABRICS 百分百室外面料 Indoor 室内 Outdoor 户外 Hospitality 酒店工程	100% Dyed Solid Polyester / 纯色涤纶布	
	Abrasion test/磨损 (ASTM D4157 in Rubs)	> 15000 Water repellent/泼水度 (AATCC 22-2005, max 100) 90%
	Pilling/起球 (ISO 12495-2 5000 Revolutions) 4-5 (ASTM D4970 1000 Moments) 4-5	UPF Testing/紫外线保护系数 (AS/NZS 4399-1996) 50+ (Actual rating >500)
	Colour Fastness to Light/日光牢度 (AATCC 16-2004, Option 3 Grey scale) >Class3.0@200hrs (ISO 105-B02:2014 Blue wool ref.) 5	CA Technical Bulletin 117-2013/美标防火 PASS Flammability BS 5852/英标防火 UPON REQUEST

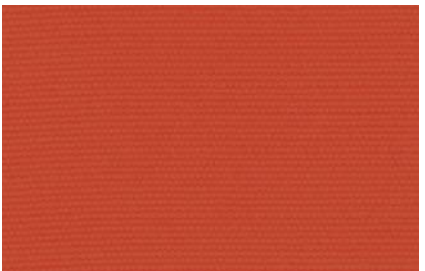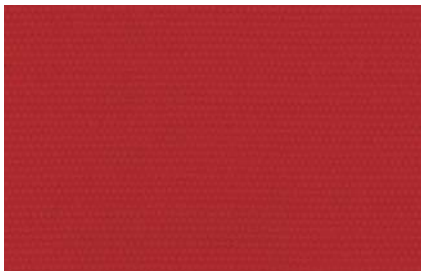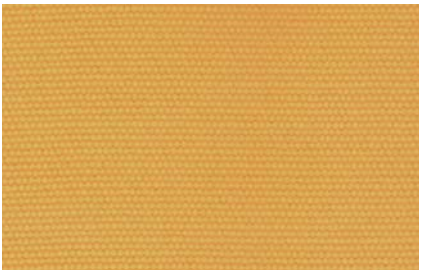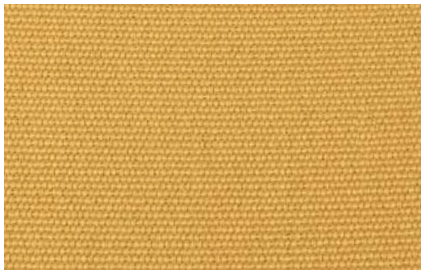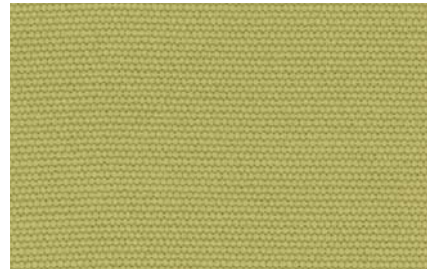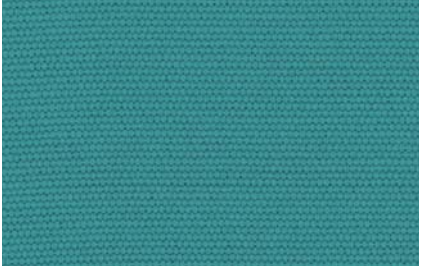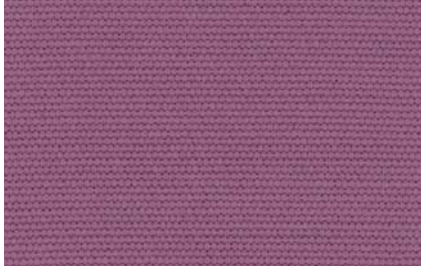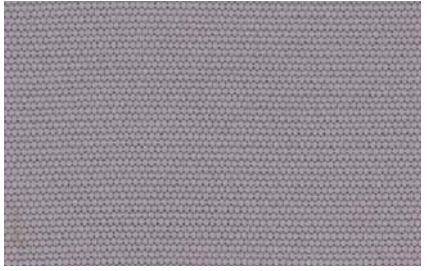		
15815801158cm300g/m²(± 10%)	15815823158cm300g/m²(± 10%)	15815824158cm300g/m²(± 10%)
		
15815802158cm300g/m²(± 10%)	15815804158cm300g/m²(± 10%)	15815850158cm300g/m²(± 10%)
		
15815803158cm300g/m²(± 10%)	15815822158cm300g/m²(± 10%)	15815819158cm300g/m²(± 10%)
		
15815826158cm300g/m²(± 10%)	15815817158cm300g/m²(± 10%)	15815820158cm300g/m²(± 10%)
		
15815816158cm300g/m²(± 10%)	15815424158cm300g/m²(± 10%)	15815806158cm300g/m²(± 10%)


All data are based on the average ratings; different colors/styles maybe vary.

所有数据为实验室与第三方检测机构的平均技术数据。


100%OUTDOOR FABRICS 百分百室外面料 Indoor 室内 Outdoor 户外 Hospitality 酒店工程	100% Dyed Solid Polyester / 纯色涤纶布	
	Abrasion test/磨损 (ASTM D4157 in Rubs)	Water repellent/泼水度 (AATCC 22-2005, max 100)
	Pilling/起球 (ISO 12495-2 5000 Revolutions) (ASTM D4970 1000 Moments)	UPF Testing/紫外线保护系数 (AS/NZS 4399-1996)
Colour Fastness to Light/日光牢度 (AATCC 16-2004, Option 3 Grey scale) (ISO 105-B02:2014 Blue wool ref.)		CA Technical Bulletin 117-2013/美标防火 PASS Flammability BS 5852/英标防火 UPON REQUEST
> 15000		90%
4-5 4-5		50+ (Actual rating >500)
>Class3.0@200hrs 5		




15815827 158cm 300g/m²(± 10%)

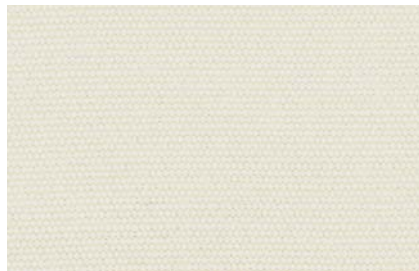


15815807 158cm 300g/m²(± 10%)

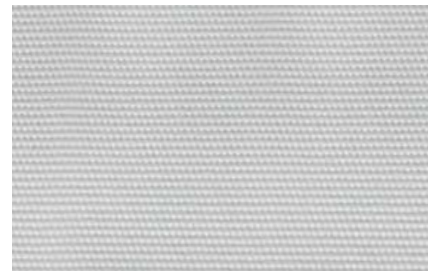


15816002 158cm 300g/m²(± 10%)

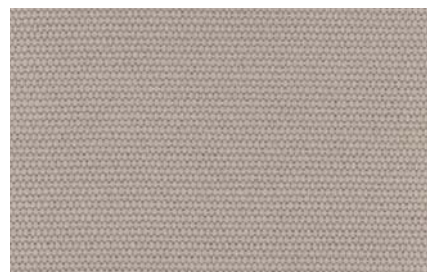


15815305 158cm 300g/m²(± 10%)

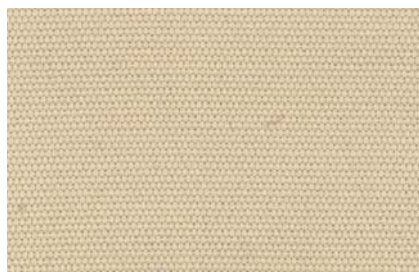


15815808 158cm 300g/m²(± 10%)

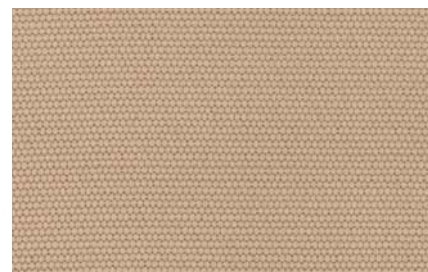

15815809 158cm 300g/m²(± 10%)

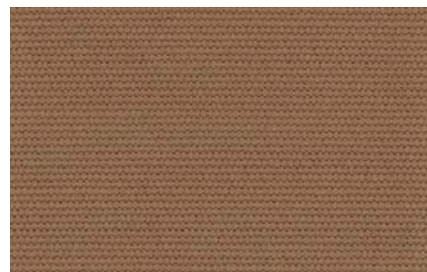


15815810 158cm 300g/m²(± 10%)

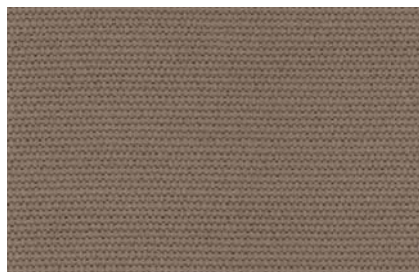

15815530 158cm 300g/m²(± 10%)



15815811 158cm 300g/m²(± 10%)

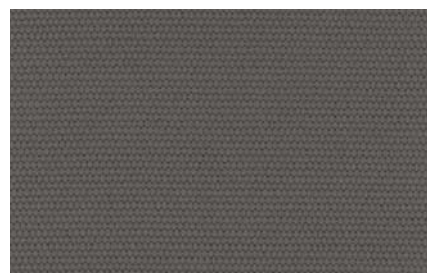


15815042 158cm 300g/m²(± 10%)



15815833 158cm 300g/m²(± 10%)




15815814 158cm 300g/m²(± 10%)

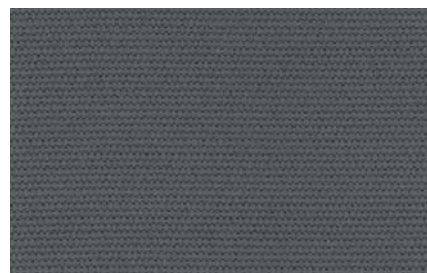

15815834 158cm 300g/m²(± 10%)



15815812 158cm 300g/m²(± 10%)

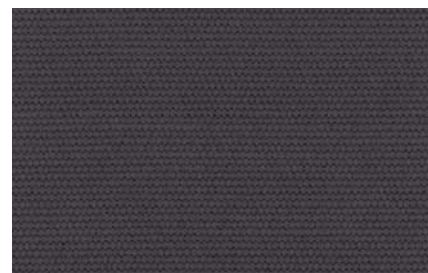

15815805 158cm 300g/m²(± 10%)

All data are based on the average ratings; different colors/styles maybe vary.
所有数据为实验室与第三方检测机构的平均技术数据。

百分百户外布保养及清洁

百分百户外面料表面都有做到泼水防污处理，不仅色牢度高，手感细腻且柔软。产品在使用过程中，建议做好清洁维护，延长布料的使用寿命。

特别留意以下事项:

- 1、采用软毛刷轻擦，以免刮花布面。
- 2、中性清洁剂（1:5）稀释，水温低于37度，可加速污渍分解。
- 4、不可接触高温，否则材质会加速变质或老化。
- 5、清洗后自然晾干。
- 6、不可机洗和使用烘干机干燥。

洗涤方法:

步骤一：先用清水或无色毛巾（软毛刷）轻轻擦拭掉表面灰尘和其它附作物。

步骤二：用水直接冲刷或者将布料全部水浸。

步骤三：倒入稀释的中性清洁剂轻柔至出现泡沫。

步骤四：用软毛刷轻刷。顽固污渍或霉斑可浸泡15分钟后清洗。

步骤五：用水冲洗，直至表面没有泡沫。

步骤六：自然晾干。

如需要将布料再次做防护处理，请咨询专业布料护理专家。

Maintenance and Clean Instructions

100%, the multi-functional fabrics, are treated with copyrighted water and stain repellent finish; we are proud of the superior color fastness to light and comfortable soft touch.

The following instructions for easy maintenance are recommended:

- 1.Wipe off dirt gently with a soft brush to avoid scratches on the fabrics.
- 2.Use neutral detergent (1:5) diluted water which temperature below 37degreesCelsius (98.60 degreesFahrenheit)to speed up the decomposition of stains.
- 3.Do not put Axvision fabrics near the areas of high temperature to prevent from quick deterioration or aging.
- 4.Air Dry after washing.
- 5.Not allow machine washing and dryer.

How to Clean:

Step 1: Wipe off dirt with a soft brush or a rinsed white towel.

Step 2: Hand wash directly or soak all the fabrics in water.

Step 3: Pour the diluted neutral detergent gently until foams occur.

Step 4: Lightly brush with a soft brush. Stains or mildew can be soaked for 15 minutes to clean.

Step 5: Rinse fabrics with water until there is no foam on the surface.


Step 6: Air Dry.

If you need to retreat the fabrics with the extra special cares, please consult professional fabric specialists.

广州晴晴家具贸易有限公司（简称晴晴）是一家专注于户外布料的研究、设计、生产、销售、服务于一体的大型服务商，产品线涵盖有户外家具与遮阳面料、户外装饰材料、遮光材料及抱枕等相关配件。目前，晴晴服务超过300家优质户外制造商，产品远销世界各地。

Guangzhou Mos Trading Co., Ltd. is a company that focus on outdoor fabrics. The company aims to provide complete products and services in the outdoor performance category. Covering over 300 clients worldwide, the brands have been recognized by the most demanded designers, manufacturers and consumers. More SKUs and faster delivery are our missions to make your outdoor experience better than ever.



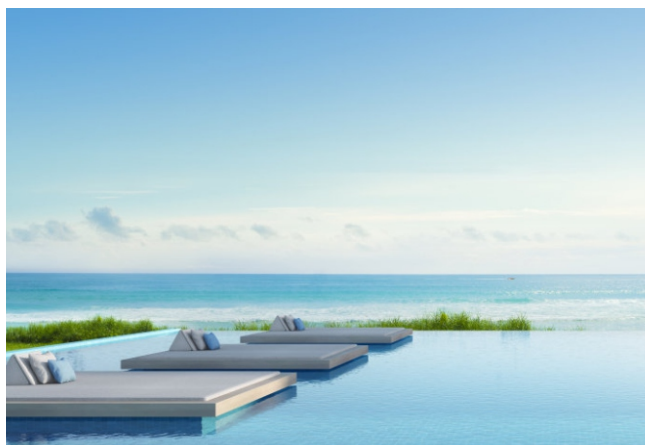

Global Headquarters / 运营总部
Mosaroma International Co., Ltd.
同恩乐有限公司
7F, Blissful Building, 243-247 Des Voeux Road, Central, Hong Kong
香港德辅道中243-247号德祐大厦7楼

China Operation Office / 中国营销中心
Guangzhou Mos Trading Co., Ltd.
广州晴晴家具贸易有限公司
No. 175 Shinan Rd., Dongchong Town, Nansha District, Guangzhou, Guangdong China
广东省广州市南沙区东涌镇市南公路175号
Tel: 020-22862298 Fax: 020-22862299



关注晴晴公众号



晴晴户外材料微店